



## User Guide

### 1/2" Dr Twist Socket Set (21 Pcs)

Art. Nr: PT5933

RVNR-01


Produced in Taiwan for Bileko

**Bileko** P.O. Box 542  
S-645 25 Strängnäs, Sweden  
Tel: +46 771 72 00 00  
[www.promeister.com](http://www.promeister.com)

## Features

- Twist sockets for removing worn or rusty nuts
- Includes a punch bar to punch stuck bolts/nuts out of socket
- For removal only. Do not use twist sockets to install new nuts
- Product NOT designed for air/impact wrench operation

## Specifications

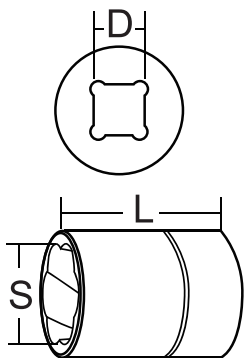

| Square Drive (D)  | 1/2" Drive          |    |    |    |    |    |    |
|-------------------|---------------------|----|----|----|----|----|----|
| Size (S) (mm)     | 6                   | 7  | 8  | 9  | 10 | 11 | 12 |
|                   | 13                  | 14 | 15 | 16 | 17 | 18 | 19 |
|                   | 20                  | 21 | 22 | 24 | 27 |    |    |
| Length (L) (mm)   | 38                  |    |    |    |    |    |    |
| Material          | SNCM 439            |    |    |    |    |    |    |
| Surface Treatment | Manganese Phosphate |    |    |    |    |    |    |
| Hardness          | HRC 50-53           |    |    |    |    |    |    |

## Safety Precautions



- Always read the instructions carefully before using the tool
- This tool is for removal only. DO NOT use twist sockets to install new nuts
- DO NOT use an air/impact wrench to work with the tool
- Ensure the working area has adequate lighting
- Keep children and unauthorised persons away from unrelated materials
- DO NOT allow untrained persons to use this toolkit
- Always wear eye protection that meets OSHA and ANSI Z87.1 standards
- Always wear gloves when working with the tool
- Always wear ear protection
- Disposal: Customers should follow local regulations to handle used/wasted parts.

## Instructions

1. Choose a suitable-sized twist socket and fit it to the nut to be removed (fig 1&2).
2. Connect the ratchet wrench or spanner to the socket and turn it counter-clockwise (fig 3).
3. The nut maybe stuck in the socket after removal. Use a punch bar provided and a hammer to punch the stucked nut out of the twist socket (fig 4, 5, and 6).

